Lever-type Detector Switches SW[]AB-252/-253/-254 Series

1/3

Features


Miniaturized for space saving design.

- Superior reliability at micro-current by employing a sliding contact.
- This is a compact detector switch which can be pressed either horizontally or vertically.
- ◇A wide variety of operation components is possible based on the application.

Applications

Mechatronic detection for audio and VCR CD-ROM DVD units.

Products Number System

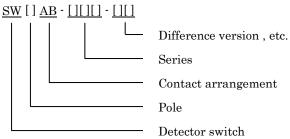



Actual size

Products Line

| No | Products No | Pole | Position | Operating force | Notes |
|----|--------------|------|----------|--------------------|------------------------------------|
| 1 | SW1AB-252S | 1 | 1 | 0.4N max. | 2 operating direction is possible. |
| 2 | SW1AB-252-8S | 1 | 1 | 0.35N max. | 3 operating direction is possible. |
| 3 | SW1AB-253-9 | 1 | 1 | 0.4N max. | 2 operating direction is possible. |
| 4 | SW2AB-254-9A | 2 | 1 | 0.4N max. | 2 operating direction is possible. |


Notes : The above 1 to 2 are the lever-variation. (Same body) The above 3 to 4 are the body-variation. (Same lever)

[Typical Specifications

| Item | Specification | | | |
|--------------------------|------------------------------------|--|--|--|
| Ratings (max.) | 0.5 to 10mA 5V DC (Resistive load) | | | |
| Contact resistance | 1 ohm max. | | | |
| Insulation resistance | 100 megohm min. 100V DC | | | |
| Withstanding voltage | 100VAC for 1min. | | | |
| Operating life with load | 100,000 cycles | | | |


SW[]AB-252/-253/-254 Series



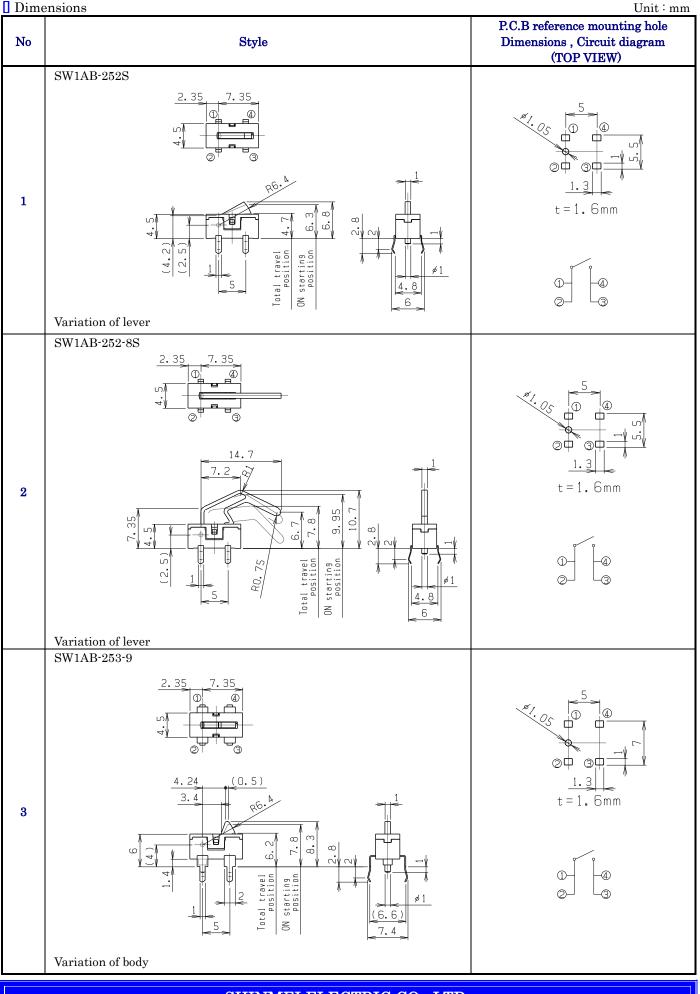

SHINMEI ELECTRIC CO., LTD.

SW[]AB-252/-253/-254 Series

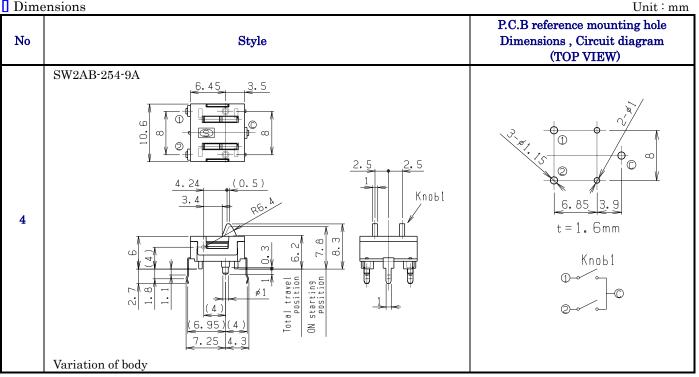

Notes

- 1. The appearance and specifications of the product may be modified to improve its performance without prior notice.
- 2. This catalog shows only outline specifications. When using the product, please obtain formal specifications.
- 3. Please see appendix [Cautions in Using Switches].
- 4. This switch is not washable.
- 5. Soldering shall be done with actuator at free position and take care not to attach flux on plastic portion.
- 6. Note that if the stress is applied to the terminals during soldering, they might cause deformation and defects in electrical performance.
- 7. In manual soldering, consideration should be given to apply the soldering iron to the tip of the terminal so that unusual pressure is not applied to the terminal.
- 8. In case circuit and software design consideration against chattering and bouncing shall be taken as below. Read a few times. (Ex. 5ms for 5 times)
 - Set delay time.
 - Set integral circuit.
- 9. As to threshold voltage, center setting is recommended.
- 10. Care shall be taken not to apply stress to the body of switch as it may affect the performance.
- 11. Please confirm the performance on actual operation by simulation with actual environment environments for high reliability.