

Slide Switches

Lock Slide Switches, JSD Series

■ Features


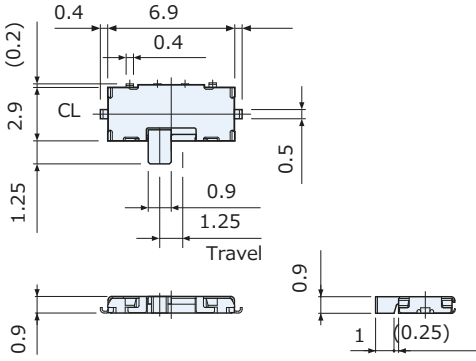


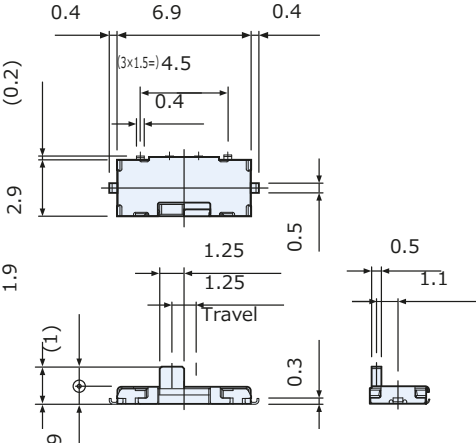
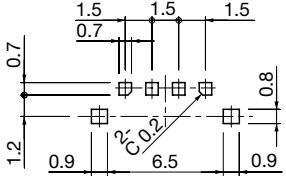
1. Only 0.9mm short for thinner equipment design possibilities.
2. A small 29.33mm² PWB occupancy area for higher-density mounting on PWB.
3. Two directions, vertical or horizontal, are available for the knob.

■ Specification

1. Rating : 10mA, 6V DC
2. Contact Resistance : 1Ω max.
3. Insulation Resistance : 100MΩ min.
4. Withstanding Voltage : 100V AC (for one minute)
5. Circuit : SPDT
6. Operating Force : 1.5±1.0N
7. Travel : 1.25mm
8. Operating Life : 10,000 cycles
9. Knob Direction : Horizontal (JSD1200-0211F)
: Vertical (JSD1210-0111F)
10. Operating Temperature Range : -25°C to +70°C

■ Application

Mobile phones, smart phones, digital still cameras, car audios, portable audios, PCs, PC peripherals, TVs, DVD players, industrial equipment, business equipment, home appliance and healthcare products.

<p>JSD1200-0211F</p>  <p>5,000 pcs/reel</p>		<p>Circuit : SPDT</p>  <p>P. C. Board Dimension</p>
<p>JSD1210-0111F</p>  <p>4,500 pcs/reel</p>		<p>Circuit : SPDT</p>  <p>P. C. Board Dimension</p>