

DC Power Supply Plugs / Jacks

DC Power Supply Jacks

■ Features


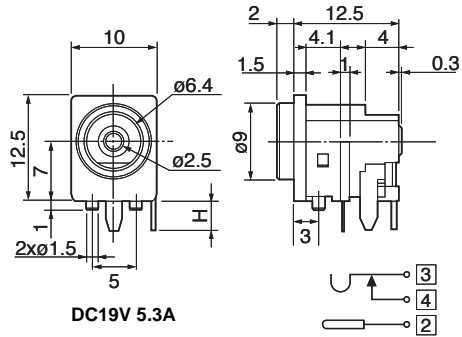
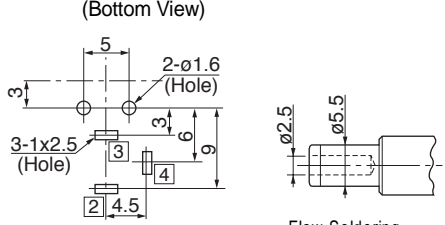
1. DC jack adapting for large and high voltage.
2. Housing material is using 94V-0 material.

■ Specification

Specification	Part No.	LGP7031-11	F
Rating		5.3A, 19V DC	
Contact Resistance		50mΩ max.	
Insulation Resistance		100MΩ min. at 500V DC	
Withstanding Voltage		250V AC (for one minute)	
Insertion Force		29N max.	
Withdrawal Force		2.94 to 29N	
Operating Temperature and Humidity Range		-30 to +80	85%R.H. max.

■ Application

Printers and scanners, etc.

Part No.	Dimension / Circuits	P.C.Board Dimension (The Pattern Side) Applicable Plug									
LGP7031-11 □□F	  <p>DC19V 5.3A</p> <p>Circuits</p>	<table border="1"> <thead> <tr> <th>□□</th> <th>H</th> <th>Terminal Shape</th> </tr> </thead> <tbody> <tr> <td>00</td> <td>3.5</td> <td>Straight Type</td> </tr> <tr> <td>01</td> <td>2.0</td> <td>Straight Type (Short)</td> </tr> </tbody> </table> <p>(Bottom View)</p>  <p>Flow Soldering</p>	□□	H	Terminal Shape	00	3.5	Straight Type	01	2.0	Straight Type (Short)
□□	H	Terminal Shape									
00	3.5	Straight Type									
01	2.0	Straight Type (Short)									